



DATA SHEET

ESSENTA

DHW heat pump

ESSENTA system

Data Sheet - ESSENTA - EN / 98-25-23-220176-02

This work is protected by copyright.

Any use of this document outside of the copyright and Related Rights Act and without the express consent of KRONOTERM d.o.o. is illegal and punishable by fine.

Despite taking extensive care to ensure the accuracy of all figures and descriptions, KRONOTERM d.o.o. reserves the right to make corrections, changes to technical details, and changes to figures with no prior notice. Information herein is given based on the latest available product information at the time of drafting and printing this document. We also reserve the right to suspend the sales of an individual product or even the entire sales program.

All updates are available in digital format. Please contact your chosen system administrator for access.

Figures are symbolic and are only intended as a reference. Despite our efforts we cannot ensure that the products' true colors, proportions, or other graphical elements will be faithfully represented in print and on electronic screens. Products may differ from their visual representations.

Printed in Slovenia.

The original documentation is written in Slovenian. All other languages are translations.

Write to info@kronoterm.com for any additional questions.

TABLE OF CONTENTS

DESCRIPTION	4
NOMENCLATURE	5
ESSENTA DHW HEAT PUMP	6
AIR INLET AND OUTLET CONFIGURATION POSSIBILITIES	8
Ambient air configuration	88
Ducted air configuration	8
ADDITIONAL EQUIPMENT ESSENTA	9
Sample installation diagram	9
ADDITIONAL EQUIPMENT ESSENTA	10
REGULATOR	11
CLOUD.KRONOTERM	12
TECHNICAL DATA	13
SOUND	15
OPERATING ENVELOPE	16
WATER HEATING TIME	17
EFFICIENCY (COP)	18
AVAILABLE HOT WATER VOLUME	19
BASIC INSTALLATION DIAGRAM	20
Ambient air configuration	2C
Air source switching	21
Ducted air configuration	22
Exhaust air utilisation from heat recovery	23
Cascade connection	24
Biomass furnace connection	25

WELCOME TO THE KRONOTERM FAMILY!

This data sheet describes the technical features of the ESSENTA DHW heat pump system.

DESCRIPTION

ESSENTA is easy to install and use. Simply install it, turn it on, and forget about it. With its simple yet sophisticated design, it provides heating for 300 liters of domestic hot water up to 65 $^{\circ}$ C in an efficient (COP(A20) 4,16), economical, environmentally friendly, and straightforward manner. It ensures reliable operation even at air temperatures as low as -10 $^{\circ}$ C.

Usage

When set to a temperature of 65 °C, it provides more than 500 liters of usable domestic hot water at 40 °C. It is therefore intended for use in households and smaller service and public activities that require domestic hot water for their daily operations (hair and beauty salons, kindergartens etc.).

Air inlet and outlet connections allow up to five different installation configurations. For its operation, ESSENTA can utilize either external or ambient air or waste exhaust air from other devices. With the installation of appropriate valves, it is also possible to switch between the listed sources.


Technology

- AFTTM AirFlow Technology The aerodynamic design with a separate compressor section allows unobstructed air flow through the evaporator. Reduced air resistence increases fan efficiency, reduces noise, and extends the device's lifespan.
- SPF™ Smart Placement Flexibility Angular connections and modular design allow placement as close as 20 cm from the wall and adjustment of intake and exhaust from the top or side ideal for installation in basements and utility rooms.
- MCS[™] MultiConnect System Extended connectivity options with other heat sources (gas, oil, pellets, solar energy), BMS systems, and smart grids.
- AFATM AirFlow Adapt The intelligent air source integration system allows for the adjustment of intake and exhaust (spatial or ducted intake) and switching between indoor, outdoor, and waste air. Optimizes flow for quiet and efficient operation in all configurations.
- IHS™ Insta Heat System Rapid heating with the help of a built-in 1,5 kW heater and boost function for immediate preparation of larger quantities of domestic hot water with temperatures up to 75 °C.
- NMSTM Noise Management System An advanced system designed to achieve exceptionally low noise levels, combining intelligent heat pump module design, premium insulation materials, and optimized airflow.
- OHSTM Optimal Hygiene System Comprehensive approach to hot water hygiene enameled buffer tank, dual magnesium anode, and external condenser to prevent limescale and bacteria buildup. Ensures long lifespan and safety of hot water.
- SC SmartCost Low electricity consumption and high efficiency, along with the possibility of weekly and daily programming, enable savings in systems with multitariff electricity billing.
- EAS™ Easy Access System Access to the main components of the device is provided from the top through a thoughtfully designed cover, allowing easy service even in rooms with lower ceiling height.
- Low GWP Global Warming Potential The heat pump has a low environmental impact as it uses an eco-friendly, non-toxic refrigerant propane (R290) with a GWP of 0,02.

NOMENCLATURE

ESSENTA-303 / 1 E D PV P3

E35ENTA 303/TE D F V F 3				
ESSENTA	DHW heat pump family designation			
30	Tank volume (300 l)			
3	Device generation			
1	No. of heat exchangers in DHW tank			
E	El. heater integrated			
D	Defrosting – passive and active			
PV	Smart Grid compatibility			
	Outputs for:			
P3	- External pump for DHW heating with gas, oil or pelet boiler - Recirculation pump - Air valves for heat source switching			

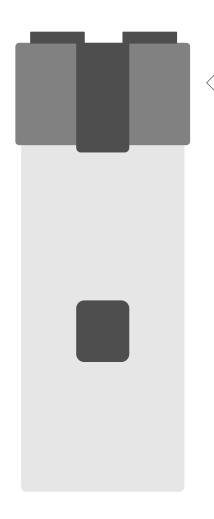

ESSENTA DHW HEAT PUMP

Version


DHW heat pump, 300 l


Model marks

ESSENTA-303/1EDPVP3

Description and dimensions

- Robust design, high efficiency and user-friendly operation
- 300-I enamelled DHW tank with closed cell high density PU foam ensures extremely low heat losses
- Various installation methods and configurations with or without airducts DN 160
- Four positions of air inlet / outlet connections: 2x top, 2x side
- Suitable for installation in rooms with ceilings at least 2,1 m high
- Flexible air intake configuration includes two closing caps

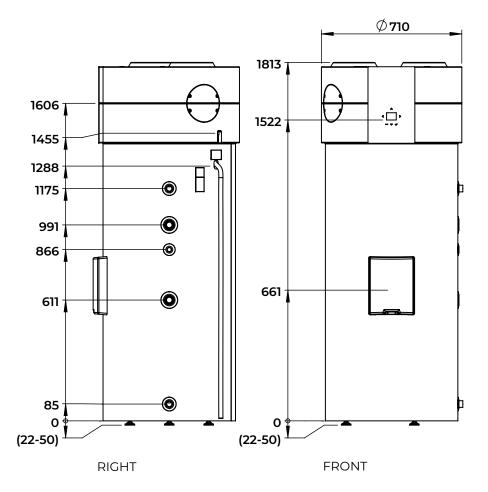

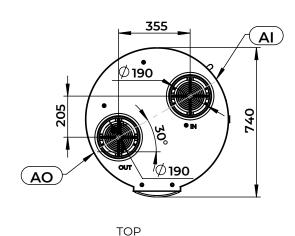

Connections

AI Air inlet 190/160 mm (f)

AO Air outlet 190/160 mm (f)


ESSENTA DHW HEAT PUMP

Primary components


- B Heat pump unit
- **C** Control panel
 - Display
 - · Heat pump regulator
- **D** DHW Tank
- E · Flange
 - · Electric heater
 - · Magnesium anode
- F Cable conduit
 - · Power supply
 - · External pumps and valves
 - · External temperature sensor
 - · SG signals
- **G** Temperature sensor channel
- H Condensate drain tube



- Al Air inlet 190/160 mm (f)
- **AO** Air outlet 190/160 mm (f)
- CW Domestic cold water G 1" ET
- FS Heat exchanger for DHW heating with external heat generator flow G 1" IT
- HW Domestic hot water G 1" ET
- RC Recirculation domestic water G 3/4" IT
- RS Heat exchanger for DHW heating with external heat generator return G 1" IT

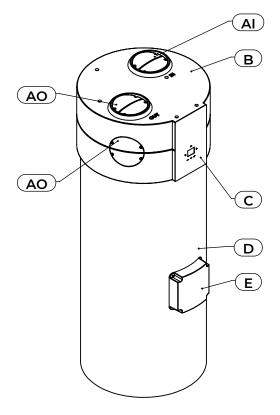


LEFT FRONT

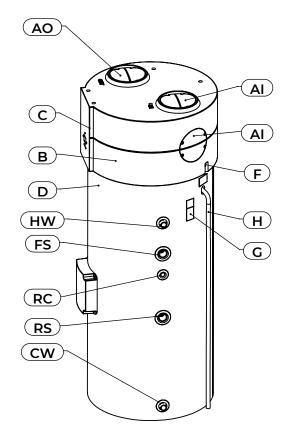


RIGHT


AIR INLET AND OUTLET CONFIGURATION POSSIBILITIES


Ambient air configuration




Ducted air configuration

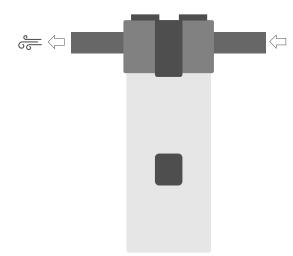

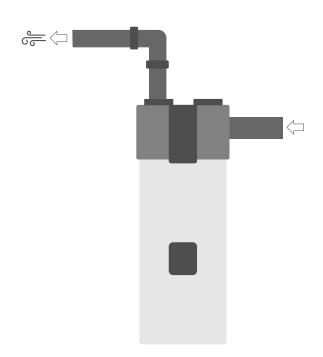


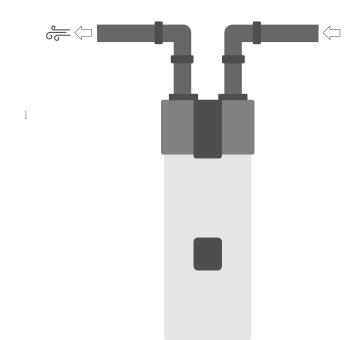

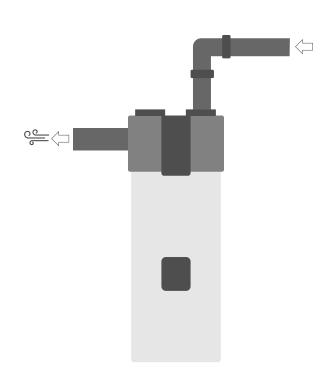

ADDITIONAL EQUIPMENT ESSENTA

Sample installation diagram

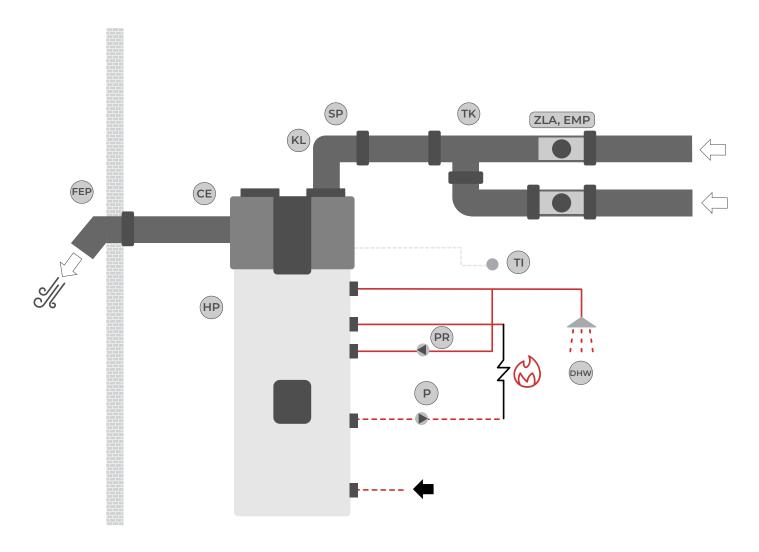

Legend

CE Pipe

FEP Facade element
HP Heat pump
KL Elbow

P Circulation pump

PR Circulation pump for domestic water recirculation

SP Ventilation pipe coupling
TI Temperature sensor

TK T-piece

ZLA, EMP Butterfly valve with drive

ADDITIONAL EQUIPMENT ESSENTA

CIRCULATION PUMP

High-efficiency circulation pump for heating or cooling with communication and power cable and configurable operating mode

OC_KT_KPL 25-180/8-75/i PWM2 12



High-efficiency circulation pump for domestic water recirculation, with ball shut-off valve, non-return valve, timer, thermostatic valve and thermal disinfection detection, threaded connection, electrical power 5 - 7 [W], max. flow 0,4 [m3/h], max. pressure 10 [bar]

· OC_STAR-Z NOVA T



Shut-off, airtight butterfly valve, with a galvanised sheet metal housing and slats, with a drive bracket 160 [mm]

· ZLA_SKG-A 160

ACTUATOR FOR A BUTTERFLY VALVE FOR BUTTERFLY VALVE

ON/OFF, 230 [V]

· EMP_LM230A

PIPE

Insulated pipe for ventilation, inner diameter 160 [mm], length 2 [m]

· CE_AF 160X2000

ELBOW

Elbow for a ventilation pipe 160 [mm]

- · KL_AF 160 90 (90°)
- · KL_AF 160 45 (45°)
- KL_AF 160 30 (30°)

T-PIECE

T-piece for a ventilation pipe 160 [mm]

• TK_AF 160-160-160

VENTILATION PIPE COUPLING

Coupling for ventilation pipe, 160 [mm]

· SP_AF 160

FACADE ELEMENT

Facade element for ventilation pipe, 160 [mm]

· FEP_160-A (ANTHRACITE)

TEMPERATURE SENSOR


Temperature sensor for the utilisation of heat from a biomass furnace, cable lenght 5 [m]


· TI_NTC ESSENTA

























REGULATOR

Model mark

KSM Lite

Description


DHW heat pump regulator


Functional characteristics

- · DHW heat pump control
- · Domestic water heating (3 modes)
- · Boost function
- · Defrosting function
- · Electrical heater control
- · Daily and weekly schedules
- · Thermal disinfection (anti-legionella programme)
- · Control:
 - Output for additional heat generators (gas, oil or pellet boiler). With an additional temperature sensor the utilisation of solar or biomass heat is also possible
 - Air valves for switching between heat sources
 - Output for recirculation pump
- · Connectivity options:
 - BMS via MODBUS RS485 protocol
 - KSM 2 heat pump system regulation*
 - Smart-grid compatible

User interface:

- Intergrated display with function buttons
- Mobile appliaction through bluetooth connection*

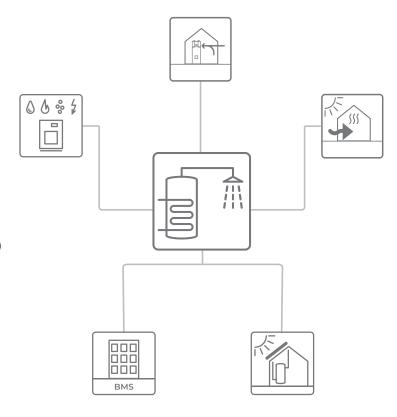



User interface of the DHW heat pump


^{*}coming soon

CLOUD.KRONOTERM

Description

CLOUD.KRONOTERM gives you oversight and control over your heat pump, its consumption and operational costs.

NOTE: The device will be compatible with the new HOME. CLOUD platform, which will be available soon.

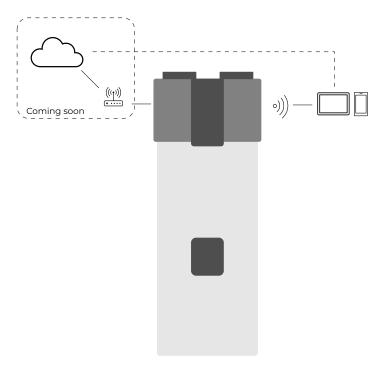

TECHNICAL DATA


DEVICE	Unit	ESSENTA 303
Heat source		air
Controller		KSM Lite
Defrosting		Active (hot gas defrost) and passive (air)
El. heater	kW	1,5
Air duct fittings	DN	160
Air flow - nominal (indoor air installation)	m³/h	400
Air flow - nominal (outdoor air installation - duct connection)	m³/h	400
Maximum available external pressure drop - nominal flow (duct connect	ion) Pa	207
EFFICIENCY - PERFORMANCE DATA ACCORDING TO EN 16147 AND D	DELEGATED REGULATION (EU) 812/	/2013
Load profile		XL
PERFORMANCE DATA FOR INDOOR AIR OPERATION A20/W10-53.5 (AI	R INLET AND AMBIENT TEMPERATU	JRE 20 °C) - AVERAGE, COLDER AND WARMER CLIMATE ZONE
Coefficient of Performance (COPdhw)	-	4,16
Heating up time	h:min	8:45
Heating up electrical energy consumption	kWh	3,38
Stand-by power input (Pes)	w	27
Maximum volume of mixed water at 40 °C	i i	393
Reference hot water temperature	°C	53,2
- i		
Water heating energy efficieny (ηwh)	%	172
Annual electrical energy consumption (AEC)	kWh/annum	975
Nominal heating capacity	kW	1,57
PERFORMANCE DATA FOR EXHAUST AIR OPERATION A20/W10-53.5 (EZONE	XHAUST AIR AND AMBIENT TEMPE	RATURE 20 °C) - AVERAGE, COLDER AND WARMER CLIMATE
Coefficient of Performance (COPdhw)	-	3,97
Heating up time	h:min	9:08
Heating up electrical energy consumption	kWh	3,48
Stand-by power input (Pes)	W	25
Maximum volume of mixed water at 40 °C	1	399
Reference hot water temperature	°C	53,3
·	%	163
Water heating energy efficieny (ŋwh)		
Annual electrical energy consumption (AEC)	kWh/annum	1025
Nominal heating capacity	kW	1,52
PERFORMANCE DATA FOR OUTDOOR AIR OPERATION A7/W10-53.5 (A	IR INLET 7 °C AND AMBIENT TEMPE	
Coefficient of Performance (COPdhw)	-	3,61
Heating up time	h:min	10:19
Heating up electrical energy consumption	kWh	3,87
Stand-by power input (Pes)	W	28
Maximum volume of mixed water at 40 °C	I	399
Reference hot water temperature	°C	53,3
Water heating energy efficieny (ηwh)	%	149
Annual electrical energy consumption (AEC)	kWh/annum	1127
Nominal heating capacity	kW	1,35
PERFORMANCE DATA FOR OUTDOOR AIR OPERATION A2/W10-53.5 (A	IR INLET 2 °C AND AMBIENT TEMPE	ERATURE 20 °C) - COLDER CLIMATE ZONE
Coefficient of Performance (COPdhw)	-	2,90
Heating up time	h:min	14,29
Heating up electrical energy consumption	kWh	4,87
Stand-by power input (Pes)	w	30
Maximum volume of mixed water at 40 °C	ı	386
Reference hot water temperature	°C	53,3
Water heating energy efficieny (ηwh)	%	119
Annual electrical energy consumption (AEC)	kWh/annum	1408
Nominal heating capacity	kW	0,94
ENERGY EFFICIENCY CLASS ACCORDING TO EU REGULATION NO. 812/	2013	
ENERGY EFFICIENCY CLASS ACCORDING TO EU REGULATION NO. 612/		
Energy efficiency class for indoor air condition	-	A++
		A++ A++

DEVICE	Unit	ESSENTA 303
ELECTRICAL DATA		
Rated voltage	V/Hz	230/50
Max. operation current	Α	10,5
Nominal electrical power	w	500*
Max. electrical power	W	2170
Electrical power - electric heater	W	1500
Additional electrical load	w	100
Fuses	Α	16
Electrical power cable	mm	/
Protection class	-	IP X1
* max power (without el. heater) at A20W53		
COMMUNICATION		
Connection to BMS		Modbus RTU, RS 485
Mobile app		Bluetooth*
Internet connection		Additional equipment*
* Coming soon		
COOLING SYSTEM		
Refrigerant - type		R290
Refrigerant - industrial designation		HC-290 (R290)
GWP (global warming potential)		0,02
Total CO ₂ equivalent of charged refrigerant		0,003
Refrigerant - quantity	kg	0,15
Max. refrigerant system operating pressure	MPa	3,1
DIMENSIONS AND WEIGHT - TRANSPORT Dimensions (W x H x D)	mm	755 x 1975 x 735
Weight	kg	166
	, rg	100
DIMENSIONS AND WEIGHT - NET		
Dimensions (W x H x D)	mm	710 x 1813 x 740
Weight	kg	148
RANGE OF OPERATION		
Water (heat pump only)	°C	65
Water (heat pump + additional el. heater)	°C	75
Air	°C	-10 / 45
DHW- TANK DATA		
Volume	1	290
Maximum allowed operating pressure in the heat exchanger (at 110 °C)	МРа	1,0 (10 bar)
Volume of heat exchanger	İ	8
Internal heat exchanger surface	m²	1,2
Pressure, max.	MPa	0,8 (8 bar)
Standby heat losses according to EN12897	kWh/day	2,08
DHW - WATER TANK CONNECTIONS		
Cold and hot water (CW, HW)	n .	G1
DHW recirculation (RC)	"	G3/4
Flow and return, external heat source (FS, RS)	11	G1
Condensate drain (Φ)	mm	16

SOUND

Description

- Sound power is a characteristic of a sound source and is not related to distance. It describes the total sound energy of an appropriate source that is emitted in all directions.
- Sound pressure depends on the measurement site in the sound field and describes the sound pressure at that location.
- When sound is transmitted through the structure, it is necessary to equip the connection with absorbers or compensators to prevent the transmission of unwanted structural sound.

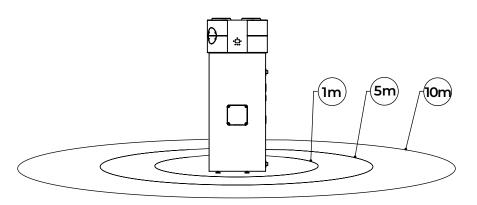


DEVICE	Unit	ESSENTA 303		
SOUND POWER LEVEL MEASUREMENT BASED ON EN 12102 / EN ISO 9614-2, ACCURACY CLASS 2				
SOUND POWER AT INDOOR AIR CONDITION				
Sound power level LW at indoor air condition	dB (A)	58*		
Sound pressure level LW at indoor air condition (with directivity factor Q = 2 and distance 3 m)	dB (A)	42*		


^{*} preliminary

OPERATING ENVELOPE

Ambient air configuration

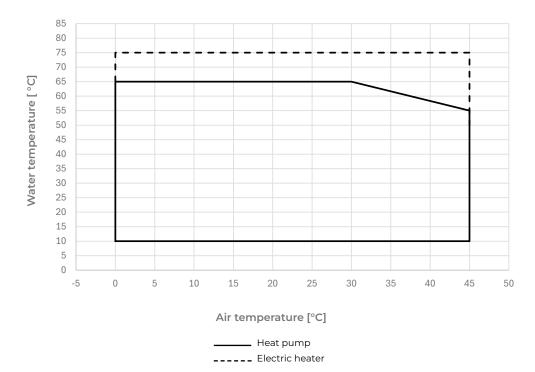


Ducted air configuration

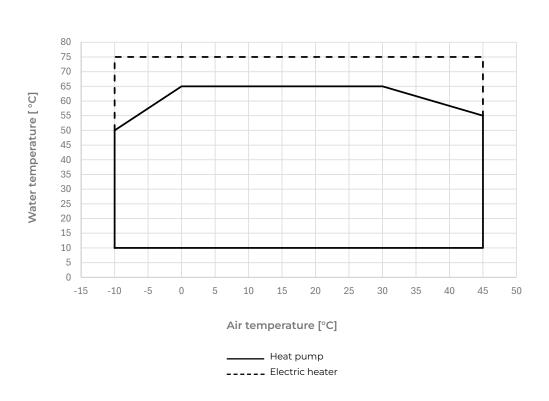


WATER HEATING TIME

Ambient air configuration

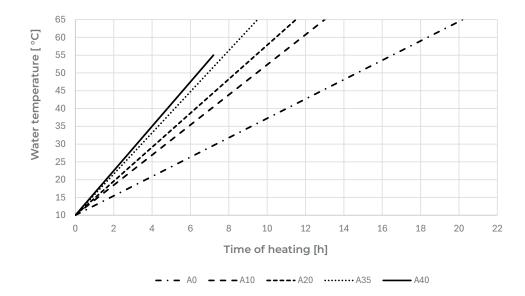


Ducted air configuration (at an ambient temperature of 20 °C)

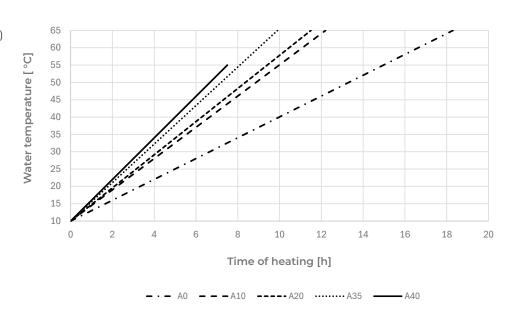


EFFICIENCY (COP)


Ambient air configuration

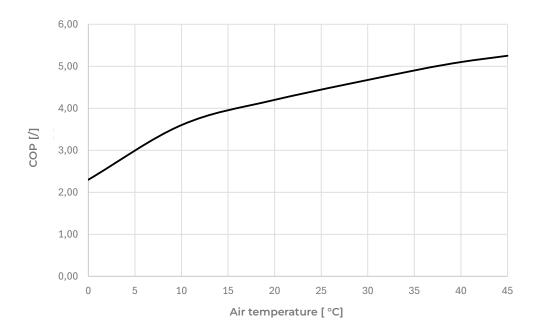

Ducted air configuration

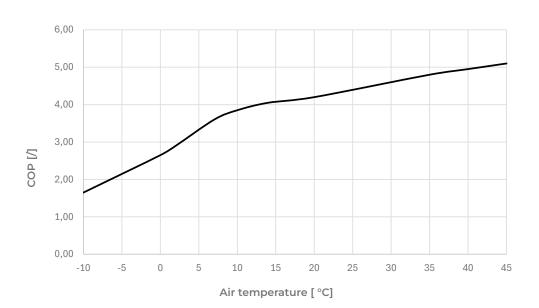


AVAILABLE HOT WATER VOLUME

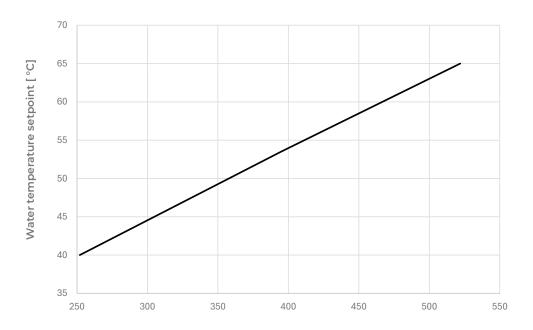

Quantity of mixed water at 40 $^{\circ}$ C [I]

Ambient air configuration

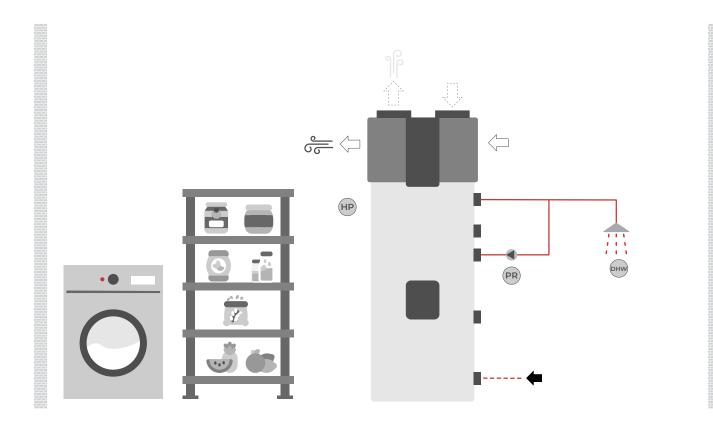


DHW Domestic hot water

HP Heat pump

PR Recirculation pump for domestic hot water

Air source switching

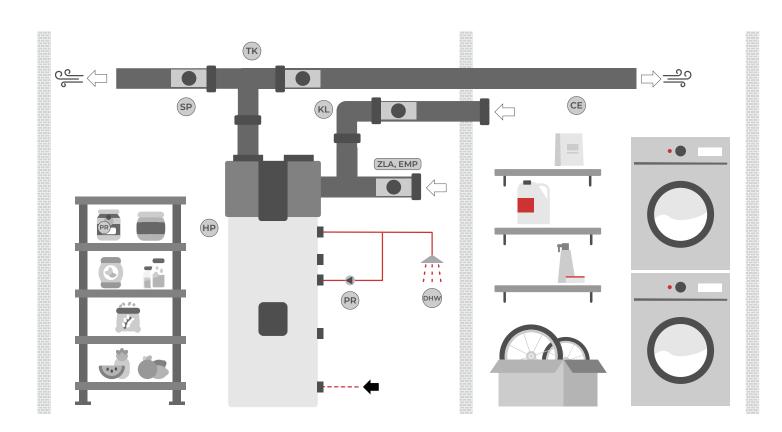

CE Ventilation pipe
DHW Domestic hot water

HP Heat pump
KL Elbow


PR Recirculation pump for domestic hot water

SP Ventilation pipe coupling

TK T-piece

ZLA, EMP Butterfly valve with drive

Ducted air configuration

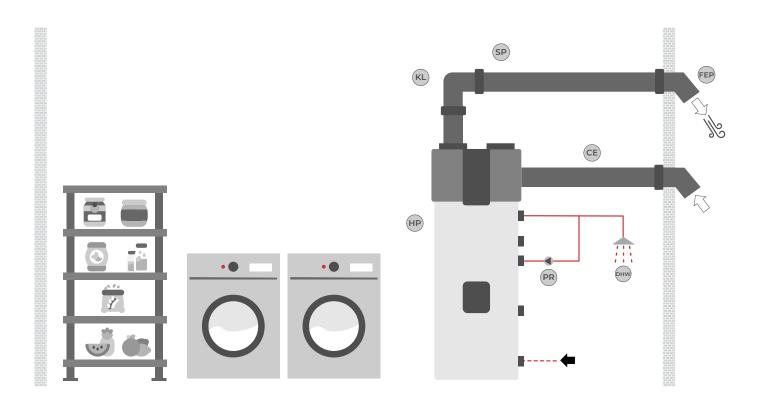

CE Ventilation pipe

DHW Domestic hot water

FEP Facade element


HP Heat pump

KL Elbow

PR Recirculation pump for domestic hot water

SP Ventilation pipe coupling

Exhaust air utilisation from heat recovery

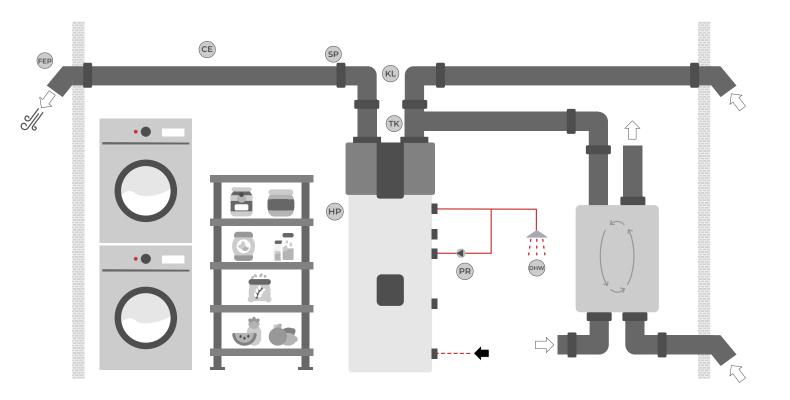

CE Ventilation pipe

DHW Domestic hot water

FEP Facade element

HP Heat pump


KL Elbow

PR Recirculation pump for domestic hot water

SP Ventilation pipe coupling

τκ T-piece

Cascade connection

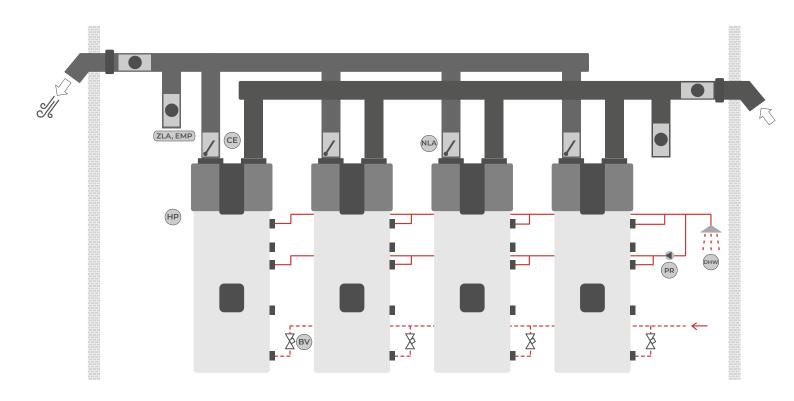


BV Balancing valve
CE Ventilation pipe
DHW Domestic hot water

HP Heat pumpNLA Check valve

PR Recirculation pump for domestic hot water

ZLA, EMP Butterfly valve with drive

Biomass furnace connection

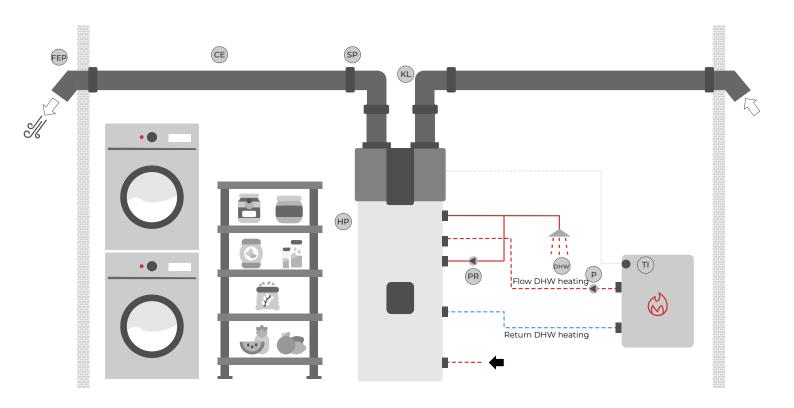

CE Ventilation pipe

DHW Domestic hot water

FEP Facade element

HP Heat pump

KL Elbow

P Circulation pump

PR Recirculation pump for domestic hot water

SP Ventilation pipe coupling
TI Temperature sensor

ESSENTA System 27

KRONOTERM d.o.o.
Trnava 5e, 3303 Gomilsko, SLO
T +386 3 703 16 20
www.kronoterm.com